



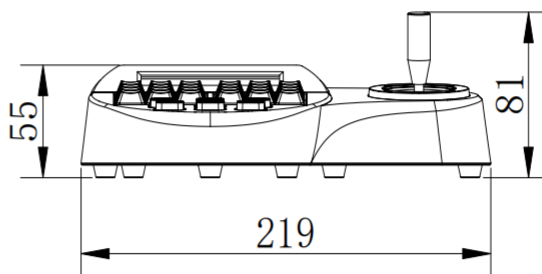

Key Features:

- Universal 3D joystick
- Built-in Pelco P/D protocol
- Mini keyboard, controllable speed of pan/tilt and zoom in/out
- Selectable baud rate 2400/4800/9600/19200bps
- OSD menu, display address/protocol/baud rate/ minitor ID/joystick status etc
- 4 sets keyboard cascade connection, max controllable 128pcs devices
- Power consumption: 4.2W
- Work voltage: DC(9~12V)±10%
- Working temperature: -20°~+50°

Dimension:

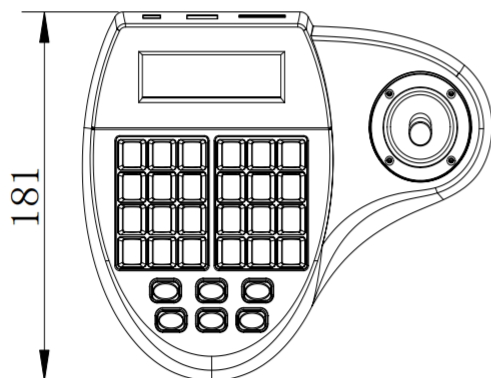

Unit:mm

Blue Icon (Tianjin) Technology Co., Ltd.

F9, Macalline Business Center
No. 29, Heiniucheng Rd.
Hexi District 300210
Tianjin, China

Email: sales@bit-cctv.com

Phone: +86-13920688922

Website: <https://www.bit-cctv.com>

Youtube: <https://youtube.com/@bitcctvsolutions>



Specifications:

Model	BIT-K7203
Communication	RS485/RS422
Distance	Max. transmission distance 1200m
Baud Rate	2400bps/4800bps/9600bps/19200bps
Protocol	PELCO D/P
Power Supply	DC (9V~12V)±10%
Electric Current	350mA
Power Consumption	4.2W
Standby Consumption	1W
Operation Temperature	-20°C~ +50°C
Operation Humidity	0~95%(Non-condensation)
Dimension	181*219*97mm (L*W*H)
Net Weight	1.3Kg